

General Safety Information

WARNING

- The WH-M988-R12 is not designed for downhill bicycle riding and freeriding. However, depending on the riding condition, the hub axle could develop a crack, which may result in failure of the hub axle. This can lead to an accident that could result in serious injury or even death. Before riding, you should carefully check your hubs to make sure that there are no cracks in the axles, and if you find any sign of a crack or any other unusual condition, do NOT use the bicycle.
- The WH-M988-R12/SM-AX75 can only be used in combination with a special frame. If they are used with any other type of frame, the wheel may come off while the bicycle is being ridden, and serious injury may occur as a result.
- Check that the wheels are fastened securely before riding the bicycle. If the wheels are loose in any way, they may come off the bicycle and serious injury may result.
- Before use, check the wheels to make sure that there are no bent or loose spokes, dents, scratches or cracks on the rim surface. Do not use the wheel if any of these problems are found.
- The wheel is designed for trail riding. Do not use it for downhill riding, otherwise the wheel may become bent or otherwise damaged, and accidents may occur as a result.
- These wheels are designed exclusively for use with disc brakes. Do not use these wheels with rim brakes.
- Be sure to read the Service Instructions for the disc brakes and the SM-AX75 together with these Service Instructions.
- Obtain and read the service instructions carefully prior to installing the parts. Loose, worn or damaged parts may cause the bicycle to fall over and serious injury may occur as a result. We strongly recommend only using genuine Shimano replacement parts.
- Read these Technical Service Instructions carefully, and keep them in a safe place for later reference.

CAUTION

- Do not use rim tape. Rim tape may make it difficult to remove and install the tire, and the tire or tube may become damaged or the tires may suddenly puncture and come off, and severe injury may result.

NOTICE

- Use genuine Shimano spokes, nuts, plugs and washers, otherwise damage to the rim and hub unit may result.
- The air pressure should be within the range of 200-400 kPa (29-58 psi).
- Be careful not to overtighten the plugs when adjusting the spoke tensions. If the plugs are overtightened, damage to the rim may result. (We recommend that you ask authorized bicycle dealers to make the adjustments.)
- We do not recommend that you use general-purpose alkaline puncture repair agents, as they may cause the rims to corrode and allow air leaks to occur.

Note

- If the wheel becomes stiff and difficult to turn, you should lubricate it with grease.
- Do not apply any oil to the inside of the hub, otherwise the grease will come out.
- You should periodically wash the sprockets in a neutral detergent and then lubricate them again. In addition, cleaning the chain with neutral detergent and lubricating it can be an effective way of extending the useful life of the sprockets and the chain.
- If the chain keeps coming off the sprockets during use, replace the sprockets and the chain.
- This product is not warranted against damage resulting from use such as jumping while riding or if the bicycle falls over, except if such malfunctions result from non conforming materials or manufacturing methods.
- Special spoke wrenches are available as optional accessories.
- We recommend that you ask authorized bicycle dealers to adjust the spoke tensions if there is any initial play in the spokes and after the first 1,000 km of riding.
- Do not use detergents or chemical cleaners to wipe the wheel, otherwise they may cause the air sealant that has been applied to the joints in the rim to peel off.
- Do not use detergent or other chemicals when wiping the wheel, otherwise it may cause the sticker on the rim to peel off.
- Reflectors are also sold separately. Please ask your bicycle dealer for details.

Model number	Specification	Color
RR-550-WUW SW W/O BRACKET	JIS / CPSC	White
RR-550-WUA SW W/O BRACKET	AS	Amber
RR-317-WUA SW W/O BRACKET	DIN	Amber

- Spoke protectors are also sold separately. Please ask your bicycle dealer for details.

CP-WH14A	CS-M980
----------	---------

- For maximum performance we highly recommend Shimano lubricants and maintenance products.
- Parts are not guaranteed against natural wear or deterioration resulting from normal use.

Technical Service Instructions SI-4G50A-001

WH-M988-R12

Wheel

In order to realize the best performance, we recommend that the following combination be used.

Chain	CN-M980
Cassette sprocket	CS-M980
Rotor	SM-RT98
Freehub axle (rear hub axle)	SM-AX75

SHIMANO

SHIMANO AMERICAN CORPORATION SHIMANO EUROPE B.V. SHIMANO INC.
 One Holland, Irvine, California 92618, U.S.A. Phone: +1-949-951-5003 Industrieweg 24, 8071 CT Nunspeet, The Netherlands Phone: +31-341-27222 3-77 Omatsubo-cho, Sakai-ku, Sakai-shi, Osaka 590-8577, Japan

* Service Instructions in further languages are available at : <http://techdocs.shimano.com>


Please note: specifications are subject to change for improvement without notice. (English) © Jan. 2010 by Shimano Inc. AWS SZK Printed in Japan.

Specifications

Speeds	10
No. of spokes	24
Rim width	25.8 mm
Rim size	26"
Applicable tire size	26 x 1.95 ~ 2.5
Applicable brakes	Disc brake
Overlock nut dimensions	142 mm
Axle diameter	ø12

Replacing the spokes

- Pass the washer and plug over the spoke.
- After inserting the spoke into the hole in the hub flange, tighten the nut. When installing, use the spoke stopper to secure the spoke so that it does not turn, and then insert a screwdriver or similar tool into the groove in the nut to screw in the nut.
- Turn the plug clockwise to screw it into the screw hole in the rim. At this time, use the spoke stopper to stop the spoke from turning.

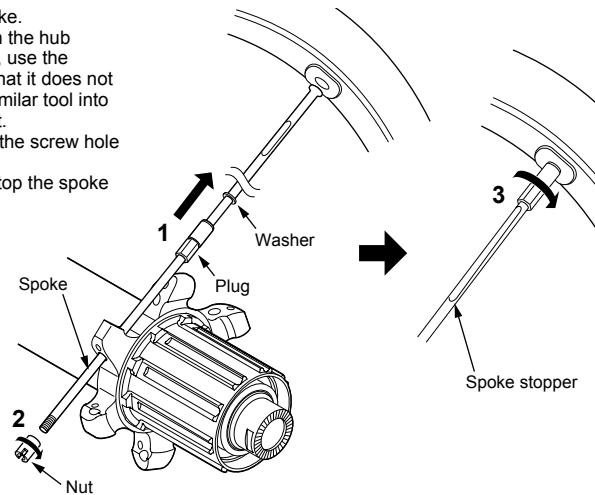


Note:

- If the washer is not installed, it will not be possible to adjust the spoke tension, so be sure to include the washer.
- Tighten the nut as far as the edges of the thread.


Spoke lacing

Lace the spokes as shown in the illustration. To assemble the wheels, use the assembly tool TL-FH12.

Left side

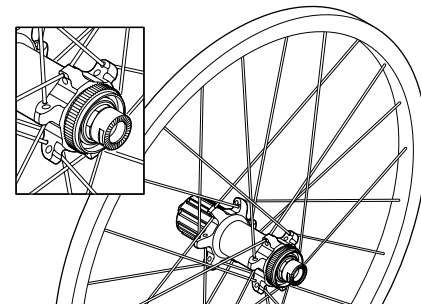

Right side

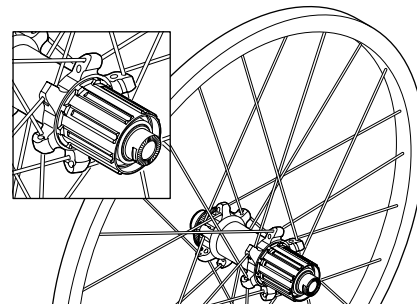


Spoke tension value

Left side	Right (sprocket) side
600 - 1000 N (135 - 225 lbf)	900 - 1350 N (202 - 304 lbf)

* These values should be used as a guide only.

Maintenance


The unit can be disassembled as shown in the illustration. Apply grease to the various parts at periodic intervals.

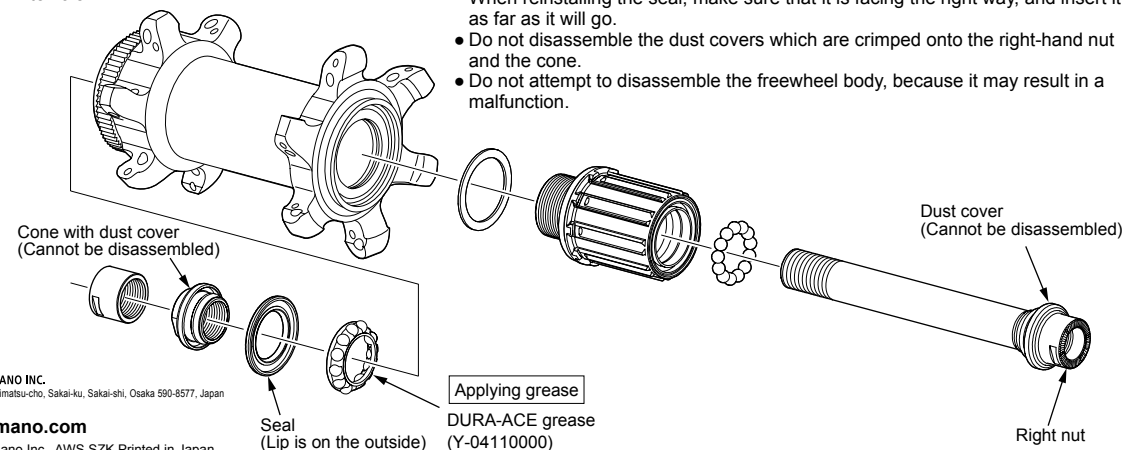

Applying grease
 DURA-ACE grease
 (Y-04110000)

Installation of the HG sprockets


For each sprocket, the surface that has the group mark should face outward and be positioned so that the wide parts of the gear projections on each sprocket and the A part (where the groove width is wide) of the freewheel body are aligned.

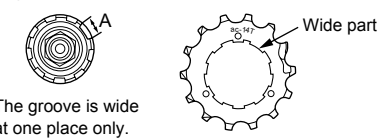

For installation of the HG sprockets, use the special tool (TL-LR15 / LR10) to tighten the lock ring.


Tightening torque:
 30 - 50 N·m (261 - 434 in. lbs.)

To replace the HG sprockets, use the special tool (TL-LR15 / LR10) and TL-SR21 to remove the lock ring.




Replacement of the freewheel body

- First, pull out the hub axle by following the procedure shown in the illustration. The double-lock section at the freewheel side cannot be disassembled.




Left side Tightening torque:
 15 - 20 N·m (132 - 172 in. lbs.)

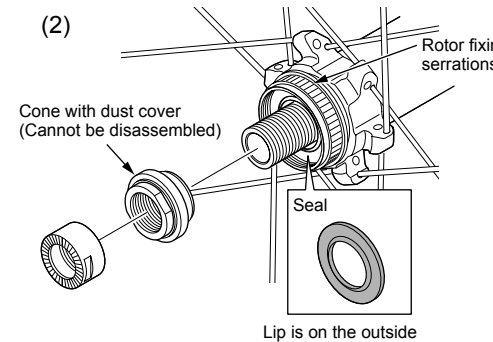


Note:

- When removing and installing the seal, do it very carefully so that the seal does not become bent. When reinstalling the seal, make sure that it is facing the right way, and insert it as far as it will go.
- Do not disassemble the dust covers which are crimped onto the right-hand nut and the cone.
- Do not attempt to disassemble the freewheel body, because it may result in a malfunction.

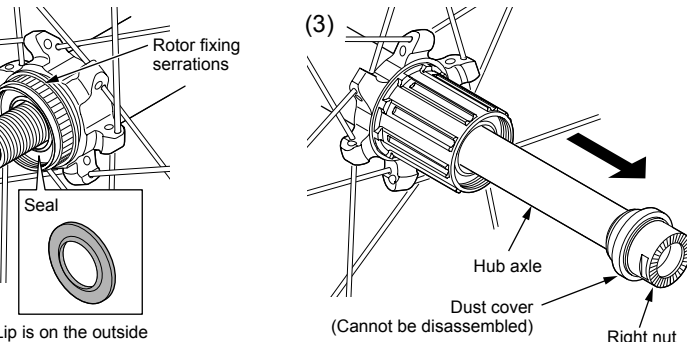


- After removing the hub axle, remove the freewheel body fixing bolt (inside the freewheel body), and then replace the freewheel body.

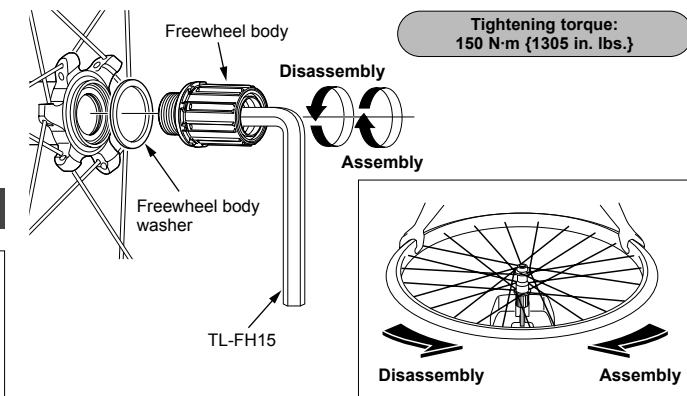

Tightening torque:
 150 N·m (1305 in. lbs.)


<Assembly>

Use the special tool (TL-HS22 / 17 mm) for installing the hub axle to tighten the lock nut so as to double-lock the mechanism as shown in the illustration.

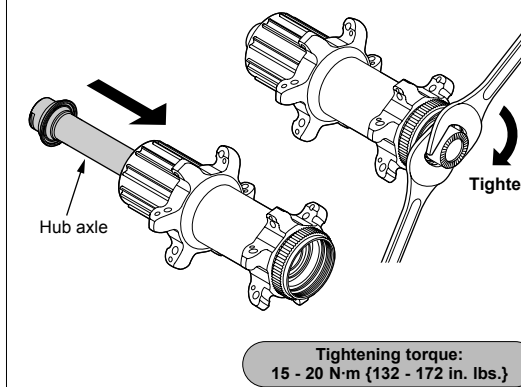

Tightening torque:
 15 - 20 N·m (132 - 172 in. lbs.)

Installation of the rotor

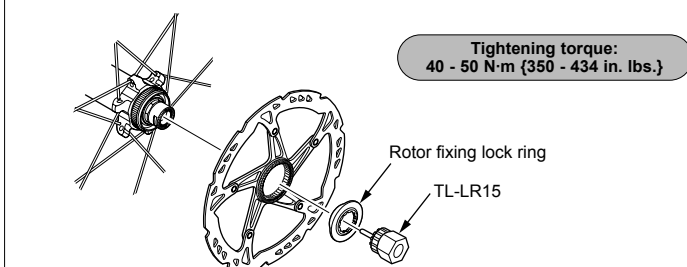

Tightening torque:
 40 - 50 N·m (350 - 434 in. lbs.)